
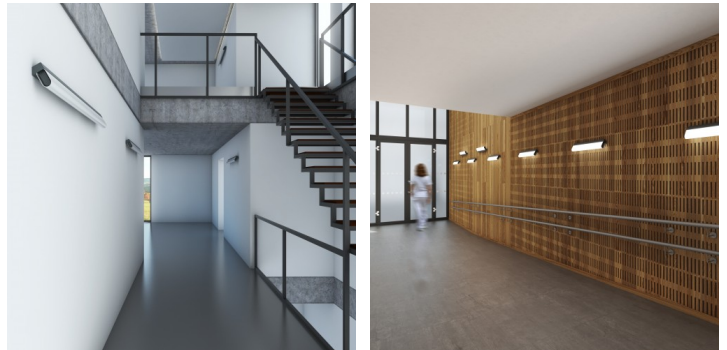


AULA AU3.L2.1500.XY

**Type:** luminaire mural

**Abat-jour:** verre acrylique

**Luminaire:** tôle dacier revêtue RAL 9016 (.41), RAL 7012 (.47), RAL Argento dorato (.70), RAL Copper (.72), RAL Bronze (.73), RAL Brass (.74)

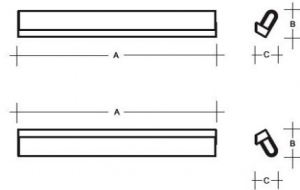

W	K	Module luminous flux lm	Luminaire luminous flux lm	A	B	C	DALI 2	IK 06	Q*	Bluetooth	Track system	Weight
51	4000	7015	6591	1500	120	95	M	-	-	Q*	-	4000

Lucis AU3.L2.1500.X AULA LED / LDC (Polar)

**Tension:** 230V

**IK code:** IK06

**Ballaste:** Driver

**CRI:** >90

**La vie de LED:** L80/F10 50000 heures

**Watt:** 51 W

**Température Couleur:** 4000 K

**Module luminous flux:** 7015 lm

**Luminaire luminous flux:** 6591 lm

**A:** 1500 mm

**B:** 120 mm

**C:** 95 mm

**Dali 2:** Disponible

**Capteur de mouvement:** Non disponible

**Module d'urgence:** Non disponible

**Contrôle Bluetooth:** Disponible sur demande

**Track system:** Non disponible

**Sádrokarton:** Non disponible

**Poids:** 4000 g

Luminaire: Lucis AU3.L2.1500.X AULA LED  
Lamps: 1 x LED G6

