MAIA A PMMA ZKS.L3A.M500.Y PA

Type: suspension lamp; ceiling lamp
Lampshade: acrylic glass PMMA
Metal parts: white painted steel plate
Pendant: self-supporting white cable reinforced with a steel wire
Driver of the luminaire is placed inside the ceiling rose (LED version).



W	K	Module luminous flux lm	Luminaire luminous flux lm	A	B	C	DALI 2						
31,3	3000	4754	4513	150	500	2000	M	–	P*	Q*	R*	D*	3400

Voltage: 230V
IK code: IK06
Ballast: Driver
CRI: >90
LED life: L80/F10 50000 hours
Watt: 31,3 W
Color temperature: 3000 K
Module luminous flux: 4754 lm
Luminaire luminous flux: 4513 lm
A: 150 mm
B: 500 mm
C: 2000 mm
Dali 2: Available
Motion sensor: Not available
Emergency module: Available on inquiry
Bluetooth control: Available on inquiry
Track system: Available on inquiry
Sádrokarton: Available on inquiry
Weight: 3400 g

Lucis ZKS.L3A.M500 PA MAIA LED / LDC (Polar)
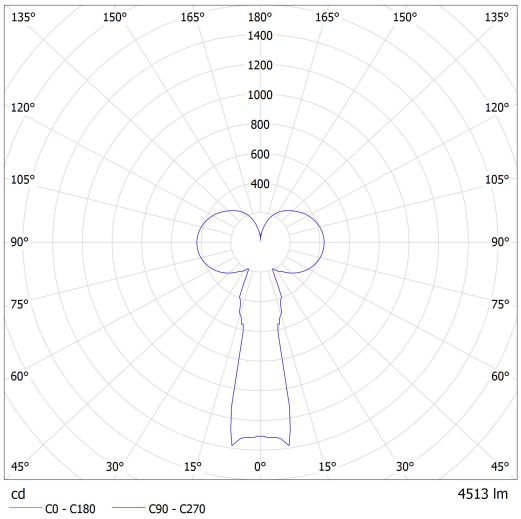
Luminaire: Lucis ZKS.L3A.M500 PA MAIA LED
Lamps: 1 x LED G6