
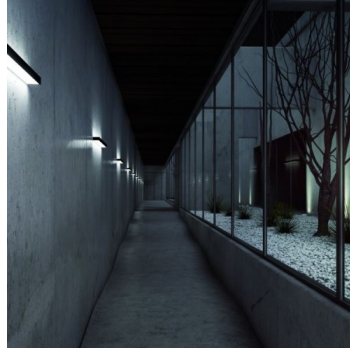


IZAR II I2.L4.1200.XY

**Type:** wall lamp

**Lampshade:** acrylic glass in combination with acrylic glass white (.92), black (.93) or stainless steel (.83)

**Light body:** white painted steel plate



W	K	Module luminous flux lm	Luminaire luminous flux lm	A	B	C	DALI 2	IK06	IP20	LED	CRI >90	Weight	
20,2	4000	2912	2594	1200	80	40	M	-	P*	Q*	-	-	2600

Lucis I2.L4.1200.X IZAR II LED / LDC (Polar)

**Voltage:** 230V

**IK code:** IK06

**Ballast:** Driver

**CRI:** >90

**LED life:** L80/F10 50000 hours

**Watt:** 20,2 W

**Color temperature:** 4000 K

**Module luminous flux:** 2912 lm

**Luminaire luminous flux:** 2594 lm

**A:** 1200 mm

**B:** 80 mm

**C:** 40 mm

**Dali 2:** Available

**Motion sensor:** Not available

**Emergency module:** Available on inquiry

**Bluetooth control:** Available on inquiry

**Track system:** Not available

**Sádrokarton:** Not available

**Weight:** 2600 g

Luminaire: Lucis I2.L4.1200.X IZAR II LED  
Lamps: 1 x LED G6

