

POLARIS ZKS ZKS.L3.300.XY



Type: suspension lamp

Lampshade: white, hand-blown, three-layered glass, satin opal matt

Metal parts: painted steel plate RAL 9003 (.31), RAL 9005 (.61), RAL chrom (.77), chrome (.80) or brass (.84)

Pendant: white or black self-carrying conductor reinforced with a steel wire

Driver of the luminaire is placed inside the ceiling rose.




W	K	Module luminous flux lm	Luminaire luminous flux lm	A	C	DALI 2	IK10	IK15	Bluetooth	Emergency	Weight
12,8	3000	1896	1716	300	2000	M _{Project 1}	-	P*	Q*	R*	D* IJ* DIALux

Operator
Telephone
Fax
e-Mail

Lucis ZKS.L3.300.X POLARIS ZKS LED / LDC (Polar)

Luminaire: Lucis ZKS.L3.300.X POLARIS ZKS LED
Lamps: 1 x LED G6

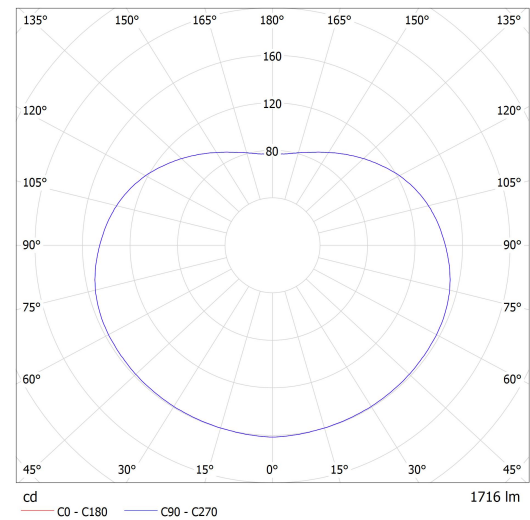

Voltage: 230V

IK code: IK01

Ballast: Driver

CRI: >90

LED life: L80/F10 50000 hours

Watt: 12,8 W

Color temperature: 3000 K

Module luminous flux: 1896 lm

Luminaire luminous flux: 1716 lm

A: 300 mm

C: 2000 mm

Dali 2: Available

Motion sensor: Not available

Emergency module: Available on inquiry

Bluetooth control: Available on inquiry

Track system: Available on inquiry

Sádrokarton: Available on inquiry

CRI > 90: Available on inquiry

Weight: 2900 g