

POLARIS ZK PE ZK.P3.630.XY PE


Type: suspension lamp

Lampshade: polyethylene opal PE

Metal parts: painted steel plate RAL 9003 (.31), RAL 9005 (.61), RAL chrom (.77), chrome (.80), stainless steel (.83) or brass (.84)

Pendant: white or black self-carrying conductor reinforced with a steel wire

The luminaire driver is placed right inside the luminaire (LED version).




| W | K | Module luminous flux lm | Luminaire luminous flux lm | A | C | DALI 2 | Motion sensor | Bluetooth | Track system | Emergency module | Weight |
|------|------|-------------------------|----------------------------|-----|------|--------|---------------|-----------|--------------|------------------|--------|
| 59,4 | 3000 | 9184 | 6977 | 630 | 2000 | M | - | P* | Q* | - | - |

Operator
Telephone
Fax
e-Mail

Lucis ZK.P3.600.X PE POLARIS ZK PE LED / LDC (Polar)

Luminaire: Lucis ZK.P3.600.X PE POLARIS ZK PE LED
Lamps: 1 x LED G5

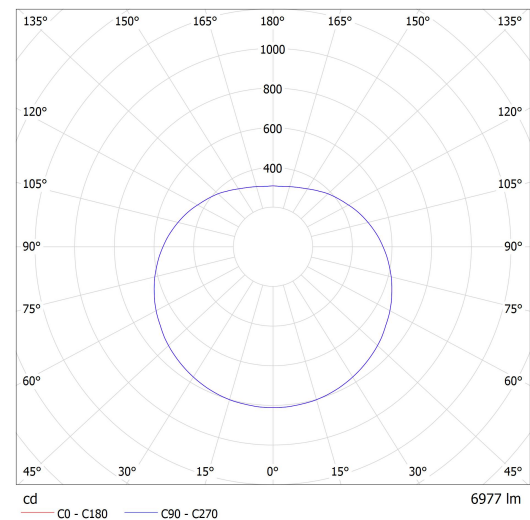

Voltage: 230V

Ballast: Driver

IK code: IK10

CRI: >90

LED life: L80/F10 50000 hours

Watt: 59,4 W

Color temperature: 3000 K

Module luminous flux: 9184 lm

Luminaire luminous flux: 6977 lm

A: 630 mm

C: 2000 mm

Dali 2: Available

Motion sensor: Not available

Emergency module: Available on inquiry

Bluetooth control: Available on inquiry

Track system: Not available

Sádrokarton: Not available

Weight: 8700 g