

POLARIS ZL MAX PE ZL1.P1.1000.XY PE



Type: suspension lamp

Lampshade: polyethylene opal PE

Metal parts: painted steel plate RAL 9003 (.31), RAL chrom (.77) or chrome (.80)

Pendant: steel wire suspension with a transparent cable

The luminaire driver is placed right inside the luminaire.

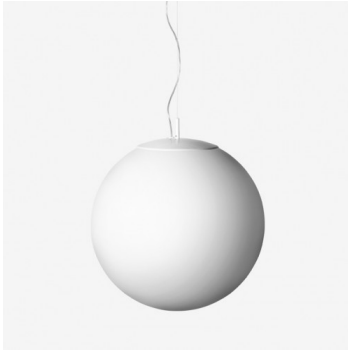

W	K	Module luminous flux lm	Luminaire luminous flux lm	A	C	DALI 1	DALI 2	CORR	IK10	IK10	Bluetooth	Track system	Weight
97,2	3000	12664	11144	1000	2000	L	M	N*	-	-	Q*	-	28000

Voltage: 230V

Ballast: Driver

IK code: IK10

ballast: EVG

CRI: >80

LED life: L80/F10 50000 hours

Watt: 97,2 W

Color temperature: 3000 K

Module luminous flux: 12664 lm

Luminaire luminous flux: 11144 lm

A: 1000 mm

C: 2000 mm

Dali 1: Available

Dali 2: Available

Corridor function: Available on inquiry

Motion sensor: Not available

Emergency module: Not available

Bluetooth control: Available on inquiry

Track system: Not available

Weight: 28000 g

Lucis ZL1.P1.1000.X PE POLARIS ZL MAX PE LED / LDC (Polar)

Luminaire: Lucis ZL1.P1.1000.X PE POLARIS ZL MAX PE LED
Lamps: 1 x LED G5

