

POLARIS S BS24.L2.350.XY





Type: ceiling and wall lamp

Lampshade: white, hand-blown, three-layered glass, satin opal matt

Light body: painted aluminium - RAL white 9016 (.41), RAL black 9005 (.45), RAL Copper (.72), RAL Bronze (.73) or RAL Brass (.74)

Colour: RAL9016 (41); RAL9005 (45); RAL Copper (72); RAL Bronze (73); RAL Brass (74)

Stropní varianta má stupeň krytí IP44, nástěnná varianta IP40.

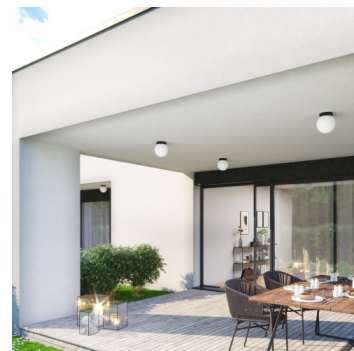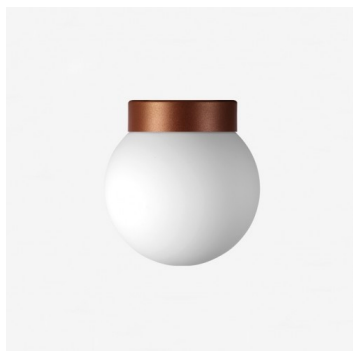

W	K	Module luminous flux lm	Luminaire luminous flux lm	A	B	C	DALI 1	DALI 2	CORR	IK	Q	Bluetooth	Emergency	Weight
14,8	4000	2297	2067	350	240	345	L	-	-	O*	-	Q*	-	3600

Voltage: 230V

IK code: IK01

Ballast: Driver

CRI: >90

LED life: L80/F10 50000 hours

Watt: 14,8 W

Color temperature: 4000 K

Module luminous flux: 2297 lm

Luminaire luminous flux: 2067 lm

A: 350 mm

B: 240 mm

C: 345 mm

Dali 1: Available

Dali 2: Not available

Corridor function: Not available

Motion sensor: Available on inquiry

Emergency module: Not available

Bluetooth control: Available on inquiry

Track system: Not available

Weight: 3600 g

Lucis BS24.L2.350.X POLARIS S LED / LDC (Polar)

Luminaire: Lucis BS24.L2.350.X POLARIS S LED
Lamps: 1 x LED G5

