
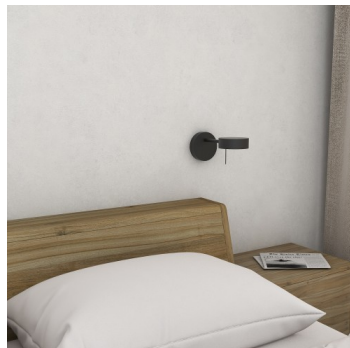


OMNIA O.150.K1.X

Typ: Wandleuchte

Lampenschirm: Acrylglas

Metallteile: lackiertes Stahlblech RAL 9003 (.60), RAL 9005 (.61) oder RAL 7016 (.62)



| W | K | Module luminous flux lm | Luminaire luminous flux lm | A | B | C | DALI 2 | Hand icon | Door icon | Bluetooth | Manual icon | Weight icon |
|-----|------|-------------------------|----------------------------|-----|-----|-----|--------|-----------|-----------|-----------|-------------|-------------|
| 9,6 | 3000 | 1237 | 960 | 125 | 130 | 295 | - | - | - | - | - | 1000 |

Spannung: 230V

Vorschaltgerät: Driver

CRI: >90

LED-Lebensdauer: L80/F10 50000 Stunden

Watt: 9,6 W

Farbtemperatur: 3000 K

Module luminous flux: 1237 lm

Luminaire luminous flux: 960 lm

A: 125 mm

B: 130 mm

C: 295 mm

Dali 2: Nicht Verfügbar

Bewegungsmelder: Nicht Verfügbar

Notlichtmodul: Nicht Verfügbar

Bluetooth-Steuerung: Nicht Verfügbar

Track-System: Nicht Verfügbar

Sádrokarton: Nicht Verfügbar

Gewicht: 1000 g

Lucis O.150.K1.X OMNIA LED / LDC (Polar)

Luminaire: Lucis O.150.K1.X OMNIA LED
Lamps: 1 x LED G5

