

CAPSULE ZL.L2.C.XY

Type: suspension lamp


Lampshade: white, hand-blown, three-layered glass, satin opal matt

Metal parts: painted steel plate – RAL 7012 (.47), RAL 9003 (.60), RAL 9005 (.61), RAL 3012 (.75) or RAL 6011 (.76)

Pendant: wire suspension with white or black cable

Colour: RAL7012 (47); RAL9003 (60); RAL9005 (61); RAL3012 (75); RAL6011 (76)

Nastavením stínítka lze změnit úhel vyzařování světelného zdroje, "viz polohy A, B nebo C." : <https://www.lucis.eu/obrazky/obrazek-10431.png>

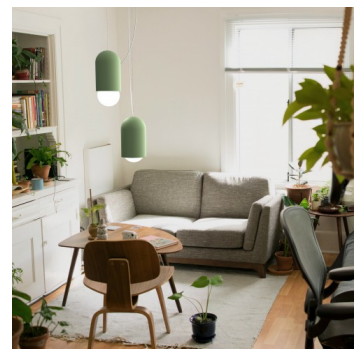

| W | K | Module luminous flux lm | Luminaire luminous flux lm | A | B | C | DALI 1 | DALI 2 | CORR | IK | Bluetooth | Track system | Weight | |
|-----|------|-------------------------|----------------------------|-----|-----|------|--------|--------|------|----|-----------|--------------|--------|------|
| 6,3 | 4000 | 1043 | 622 | 220 | 350 | 2200 | L | M | N* | - | - | Q* | R* | 3500 |

Voltage: 230V

IK code: IK01

Ballast: Driver

CRI: >90

LED life: L80/F10 50000 hours

Watt: 6,3 W

Color temperature: 4000 K

Module luminous flux: 1043 lm

Luminaire luminous flux: 622 lm

A: 220 mm

B: 350 mm

C: 2200 mm

Dali 1: Available

Dali 2: Available

Corridor function: Available on inquiry

Motion sensor: Not available

Emergency module: Not available

Bluetooth control: Available on inquiry

Track system: Available on inquiry

Weight: 3500 g

Lucis ZL.L2.C.X CAPSULE LED / LDC (Polar)

Luminaire: Lucis ZL.L2.C.X CAPSULE LED
Lamps: 1 x LED G5

