lucis.
interior lighting

Technical sheet

ZED ZK2.L2.ZA.XY

Type: suspension lamp
Lampshade: white, hand-blown, three-layered glass, satin opal matt
Metal parts: painted steel plate RAL 9003 (.60) or RAL 9005 (.61)
Pendant: white or black cable

Mounting options: ceiling/ceiling (A), ceiling/track (B), track/track (C) or plasterboard (D)



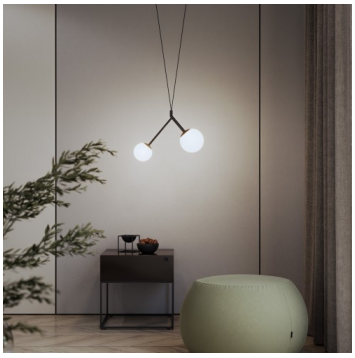

W	K	Module luminous flux lm	Luminaire luminous flux lm	A	B	C	DALI 2						
10,1	4000	1456	1223	400	955	1320	M	–	–	Q*	–	–	2000

Voltage: 230V
IK code: IK01
Ballast: Driver
CRI: >90
LED life: L80/F10 50000 hours
Watt: 10,1 W
Color temperature: 4000 K
Module luminous flux: 1456 lm
Luminaire luminous flux: 1223 lm
A: 400 mm
B: 955 mm
C: 1320 mm
Dali 2: Available
Motion sensor: Not available
Emergency module: Not available

LUCIS, s. r. o., Heršpická 814/5a, 639 00 Brno, Tel.: +420 543 248 881, E-mail: info@lucis.eu

Track system: Not available

Sádrokarton: Not available

Weight: 2000 g