

ZED ZK2.L2.ZB.XYR

Type: suspension lamp





Lampshade: white, hand-blown, three-layered glass, satin opal matt

Metal parts: white RAL 9003 (.60) or black RAL 9005 (.61) painted steel

Pendant: white or black cable

Colour: RAL9003 (60); RAL9005 (61); RAL9005 (61-ZA); RAL9005 (61-ZB); RAL9005 (61-ZC); RAL9005 (61-ZD)

Možnosti uchycení: strop/strop (A), strop/lišta (B), lišta/lišta (C) nebo sádkokarton (D)

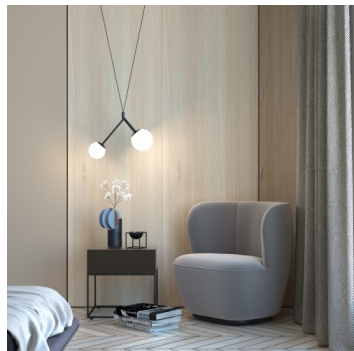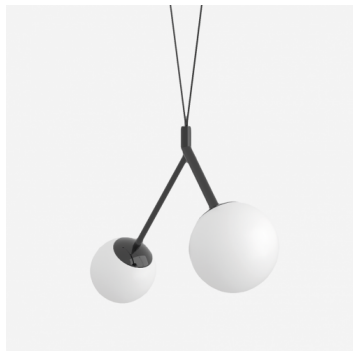

W	K	Module luminous flux lm	Luminaire luminous flux lm	A	B	C	DALI 1	DALI 2	CORR	Emergency	Motion sensor	Bluetooth	Track system	Weight
9,6	4000	1540	1219	400	955	1320	L	-	-	-	-	-	R	1600

Voltage: 230V

IK code: IK01

Ballast: Driver

CRI: >90

LED life: L80/F10 50000 hours

Watt: 9,6 W

Color temperature: 4000 K

Module luminous flux: 1540 lm

Luminaire luminous flux: 1219 lm

A: 400 mm

B: 955 mm

C: 1320 mm

Dali 1: Available

Dali 2: Not available

Corridor function: Not available

Motion sensor: Not available

Emergency module: Not available

Bluetooth control: Not available

Track system: Available

Weight: 1600 g