

ZED ZK2.L2.ZC.XYR



**Type:** suspension lamp

**Lampshade:** white, hand-blown, three-layered glass, satin opal matt

**Metal parts:** painted steel plate RAL 9003 (.60) or RAL 9005 (.61)

**Pendant:** white or black cable

Mounting options: ceiling/ceiling (A), ceiling/track (B), track/track (C) or plasterboard (D)

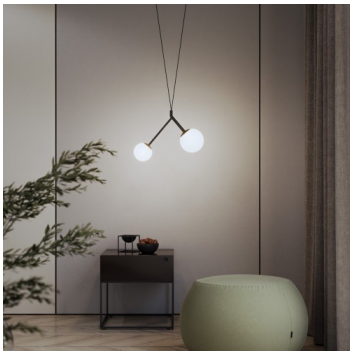

W	K	Module luminous flux lm	Luminaire luminous flux lm	A	B	C	DALI 2	Emergency	Bluetooth	Emergency	Emergency	Emergency
10,1	4000	1456	1223	400	955	1320	M	-	-	-	R	-

**Voltage:** 230V

**IK code:** IK01

**Ballast:** Driver

**CRI:** >90

**LED life:** L80/F10 50000 hours

**Watt:** 10,1 W

**Color temperature:** 4000 K

**Module luminous flux:** 1456 lm

**Luminaire luminous flux:** 1223 lm

**A:** 400 mm

**B:** 955 mm

**C:** 1320 mm

**Dali 2:** Available

**Motion sensor:** Not available

**Emergency module:** Not available

**Track system:** Available

**Sádrokarton:** Not available

**Weight:** 1600 g