




OMNIA SR1.K2.O2.XY

Type: wall lamp

Lampshade: acrylic glass

Metal parts: painted steel plate RAL 9003 (.60), RAL 9005 (.61) or RAL 7016 (.62)

Pendant: wire suspension

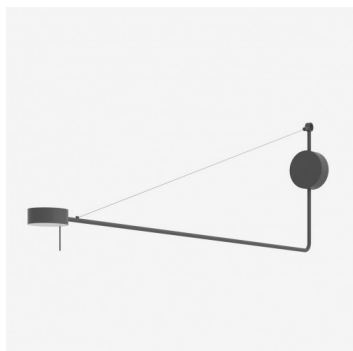

W	K	Module luminous flux lm	Luminaire luminous flux lm	A	B	C	DALI 1	DALI 2	CORR	Corridor	Motion	Bluetooth	Emergency	Weight
9,6	4000	1295	1005	1505	140	495	-	M	-	-	-	-	-	4000

Ballast: Driver

CRI: >90

LED life: L80/F10 50000 hours

Watt: 9,6 W

Color temperature: 4000 K

Module luminous flux: 1295 lm

Luminaire luminous flux: 1005 lm

A: 1505 mm

B: 140 mm

C: 495 mm

Dali 1: Not available

Dali 2: Available

Corridor function: Not available

Motion sensor: Not available

Emergency module: Not available

Bluetooth control: Not available

Track system: Not available

Weight: 4000 g

Lucis SR1.K2.O2.X OMNIA LED / LDC (Polar)

Luminaire: Lucis SR1.K2.O2.X OMNIA LED
Lamps: 1 x LED G5

