

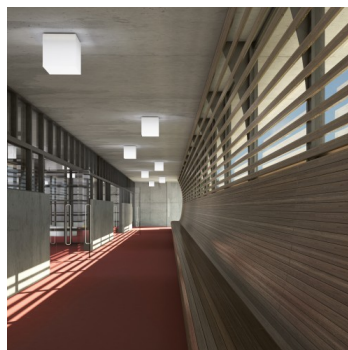


## IZAR C IC.K2.150.X

**Type:** ceiling and wall lamp

**Lampshade:** acrylic glass, sides white (.91) or black (.93)

**Light body:** white painted steel plate



W	K	Module luminous flux lm	Luminaire luminous flux lm	A	DALI 1	DALI 2	CORR	Emergency	Motion sensor	Bluetooth	Track system	Weight
9,6	4000	1295	1070	150	-	-	-	-	-	-	-	1100

**Voltage:** 230V

**IK code:** IK06

**Ballast:** Driver

**CRI:** >90

**LED life:** L80/F10 50000 hours

**Watt:** 9,6 W

**Color temperature:** 4000 K

**Module luminous flux:** 1295 lm

**Luminaire luminous flux:** 1070 lm

**A:** 150 mm

**Dali 1:** Available

**Dali 2:** Available

**Corridor function:** Available

**Motion sensor:** Available

**Emergency module:** Available

**Bluetooth control:** Available

**Track system:** Available

**Weight:** 1100 g

Luminaire IC.K2.150.X IZAR C LED / LDC (Polar)

Luminaire: Lucis IC.K2.150.X IZAR C LED  
Lamps: 1 x LED 103/73-G5

