




IZAR C IC.L1.330.XY

**Type:** ceiling and wall lamp

**Lampshade:** acrylic glass; acrylic glass, sides white (.91) or black (.93)

**Light body:** white painted steel plate

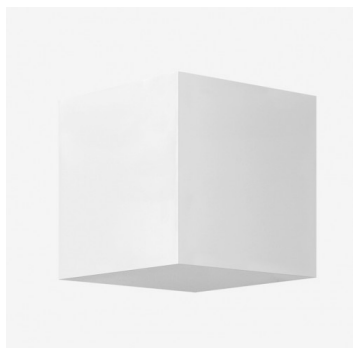

W	K	Module luminous flux lm	Luminaire luminous flux lm	A	DALI 1	DALI 2	CORR	Handicap	Fire	Bluetooth	Emergency	Weight
11,3	3000	1880	1520	330	L	M	N*	-	P*	Q*	-	5200

Lucis IC.L1.330.X IZAR C LED / LDC (Polar)

**Voltage:** 230V

**IK code:** IK06

**Ballast:** Driver

**CRI:** >80

**LED life:** L80/F10 50000 hours

**Watt:** 11,3 W

**Color temperature:** 3000 K

**Module luminous flux:** 1880 lm

**Luminaire luminous flux:** 1520 lm

**A:** 330 mm

**Dali 1:** Available

**Dali 2:** Available

**Corridor function:** Available on inquiry

**Motion sensor:** Not available

**Emergency module:** Available on inquiry

**Bluetooth control:** Available on inquiry

**Track system:** Not available

**Weight:** 5200 g

Luminaire: Lucis IC.L1.330.X IZAR C LED  
Lamps: 1 x LED 2985

