
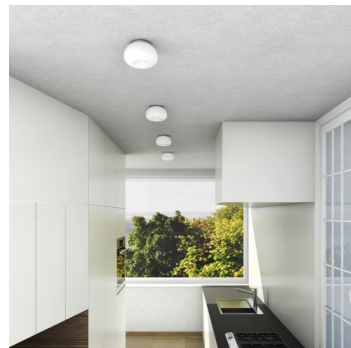


PIA S00.L1.P187.Y

Type: ceiling and wall lamp

Lampshade: white, hand-blown, three-layered glass, satin opal matt

Light body: white painted steel plate

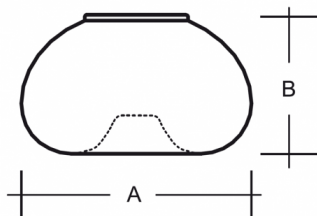

W	K	Module luminous flux lm	Luminaire luminous flux lm	A	B	DALI 1	DALI 2	CORR	IK	EMERGENCY	BT	EMERGENCY	PHASE CUT	Weight
6	3000	498	398	187	108	-	-	-	-	-	-	-	S*	1100

Voltage: 230V

IK code: IK01

CRI: >80

LED life: L80/F10 50000 hours

Watt: 6 W

Color temperature: 3000 K

Module luminous flux: 498 lm

Luminaire luminous flux: 398 lm

A: 187 mm

B: 108 mm

Dali 1: Not available

Dali 2: Not available

Corridor function: Not available

Motion sensor: Not available

Emergency module: Not available

Bluetooth control: Not available

Track system: Not available

Phase-cut dimming: Available on inquiry

Weight: 1100 g

Lucis S00.L1.P187 PIA LED / LDC (Polar)

Luminaire: Lucis S00.L1.P187 PIA LED
Lamps: 1 x LED, 3000 K

