
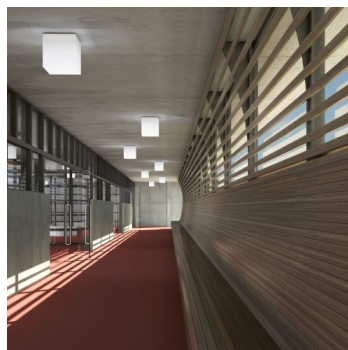


## IZAR C IC.L2.150.X

**Type:** ceiling and wall lamp

**Lampshade:** acrylic glass, sides white (.91) or black (.93)

**Light body:** white painted steel plate



W	K	Module luminous flux lm	Luminaire luminous flux lm	A	DALI 1	DALI 2	CORR	Handicap	Emergency	Bluetooth	Track system	Weight
8,9	4000	1290	1040	150	-	-	-	-	-	-	-	1200

Lucis IC.L2.150.X IZAR C LED / LDC (Polar)

**Voltage:** 230V

**IK code:** IK06

**Ballast:** Driver

**CRI:** >80

**LED life:** L80/F10 50000 hours

**Watt:** 8,9 W

**Color temperature:** 4000 K

**Module luminous flux:** 1290 lm

**Luminaire luminous flux:** 1040 lm

**A:** 150 mm

**Dali 1:** Not available

**Dali 2:** Not available

**Corridor function:** Not available

**Motion sensor:** Not available

**Emergency module:** Not available

**Bluetooth control:** Not available

**Track system:** Not available

**Weight:** 1200 g

Luminaire: Lucis IC.L2.150.X IZAR C LED  
Lamps: 1 x LED 2909

