

POLARIS ZL PE ZL1.P1.630.XY PE

Type: suspension lamp


Lampshade: polyethylene opal PE

Metal parts: painted steel plate RAL 9003 (.31), RAL chrom (.77) or chrome (.80)

Pendant: steel wire suspension with a transparent cable

Colour: RAL chrom (77) 6 (77)

The luminaire driver is placed right inside the luminaire (LED version).

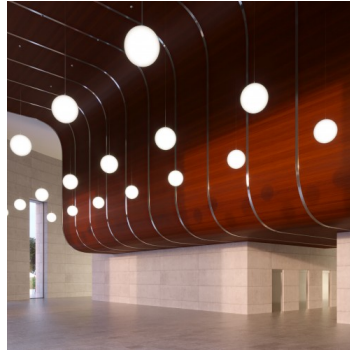

W	K	Module luminous flux lm	Luminaire luminous flux lm	A	C	DALI 1	DALI 2	CORR	IK10	IP20	Bluetooth	Track system	Weight
53,6	3000	7416	6823	630	2000	L	M	N*	-	P*	Q*	R*	8700

Voltage: 230V

Ballast: Driver

IK code: IK10

CRI: >80

LED life: L80/F10 50000 hours

Watt: 53,6 W

Color temperature: 3000 K

Module luminous flux: 7416 lm

Luminaire luminous flux: 6823 lm

A: 630 mm

C: 2000 mm

Dali 1: Available

Dali 2: Available

Corridor function: Available on inquiry

Motion sensor: Not available

Emergency module: Available on inquiry

Bluetooth control: Available on inquiry

Track system: Available on inquiry

Weight: 8700 g

Lucis ZL1.P1.630.X PE POLARIS ZL PE LED / LDC (Polar)

Luminaire: Lucis ZL1.P1.630.X PE POLARIS ZL PE LED
Lamps: 1 x LED G5

