
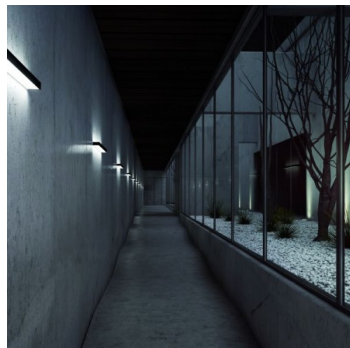


IZAR II I2.L1.900.XY

Type: wall lamp

Lampshade: acrylic glass in combination with acrylic glass white (.92), black (.93) or stainless steel (.83)

Light body: white painted steel plate



W	K	Module luminous flux lm	Luminaire luminous flux lm	A	B	C	DALI 2	Motion sensor	Emergency module	Bluetooth control	Track system	Weight
30,7	3000	4047	3600	900	80	40	M	-	-	Q*	-	2000

Voltage: 230V

IK code: IK06

Ballast: Driver

CRI: >90

LED life: L80/F10 50000 hours

Watt: 30,7 W

Color temperature: 3000 K

Module luminous flux: 4047 lm

Luminaire luminous flux: 3600 lm

A: 900 mm

B: 80 mm

C: 40 mm

Dali 2: Available

Motion sensor: Not available

Emergency module: Not available

Bluetooth control: Available on inquiry

Track system: Not available

Sádrokarton: Not available

Weight: 2000 g

Lucis I2.L1.900.X IZAR II LED / LDC (Polar)

Luminaire: Lucis I2.L1.900.X IZAR II LED
Lamps: 1 x LED G6

