
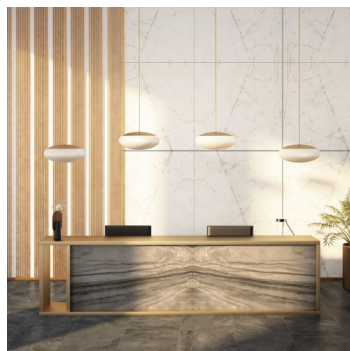


DAPHNE ZT ZT.L2.D550.XY

Type: luminaire suspendu

Abat-jour: verre blanc, soufflé de manière artisanale, à trois couches, satin opale mat

Suspension: en acier peint en blanc RAL 9003 (.31), chromé (.80), en laiton (.84), RAL chrom (.77) ou RAL Argento dorato (.70)

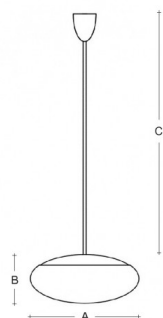

W	K	Module luminous flux lm	Luminaire luminous flux lm	A	B	C	DALI 2	IK 10	IP 20	Bluetooth	Track system	Weight	
37,1	4000	6083	4658	550	245	1000	M	-	P*	Q*	R*	-	8600

Lucis ZT.L2.D550.X DAPHNE LED / LDC (Polar)

Tension: 230V

IK code: IK01

Ballaste: Driver

CRI: >90

La vie de LED: L80/F10 50000 heures

Watt: 37,1 W

Température Couleur: 4000 K

Module luminous flux: 6083 lm

Luminaire luminous flux: 4658 lm

A: 550 mm

B: 245 mm

C: 1000 mm

Dali 2: Disponible

Capteur de mouvement: Non disponible

Module d'urgence: Disponible sur demande

Contrôle Bluetooth: Disponible sur demande

Track system: Disponible sur demande

Sádrokarton: Non disponible

Poids: 8600 g

Luminaire: Lucis ZT.L2.D550.X DAPHNE LED
Lamps: 1 x LED G6

